


# URBAN INDUSTRIAL/COMMERCIAL ROAD

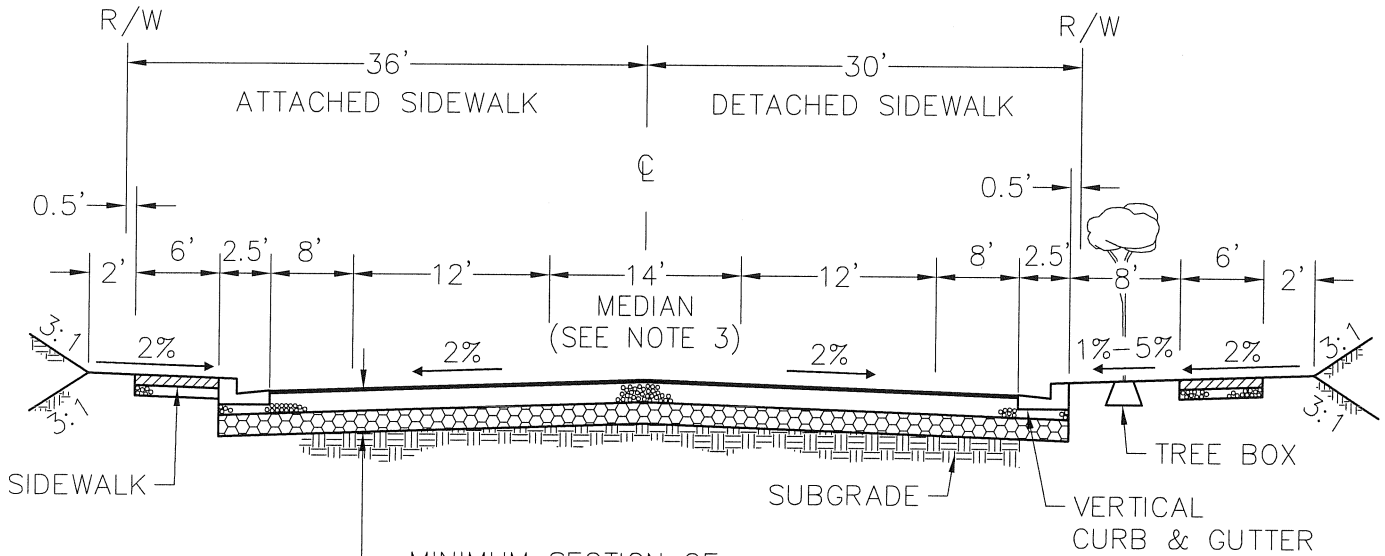

MINIMUM SECTION OF:  
 5" - 3/4" TYPE B A.C. OVER  
 12" - 3/4" CLASS 2 A.B. OVER  
 12" - LIME TREATMENT SECTION  
 (SEE NOTE 5)  
 T.I. TO BE PROVIDED BY PUBLIC WORKS DEPARTMENT

## NOTES:

1. REFER TO SECTION 6 OF YUBA COUNTY STANDARD SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
2. LIME TREATMENT SECTION, A.B. LAYER AND A.C. LAYER SHALL BE COMPACTED TO 95% RELATIVE COMPACTION.
3. RAISED MEDIAN TO BE DETERMINED BY PUBLIC WORKS. SEE STANDARD MEDIAN DETAIL IF A RAISED MEDIAN IS SPECIFIED.
4. DESIGN SPEED OF 40 MPH OR AS APPROVED BY PUBLIC WORKS.
5. SOIL STABILIZATION TREATMENT IS REQUIRED ON ALL SUBGRADE WHEN R-VALUE IS 20 OR LESS AND/OR AS RECOMMENDED BY THE GEOTECHNICAL ENGINEER AND AS DIRECTED BY PUBLIC WORKS.

YUBA COUNTY DEPARTMENT OF PUBLIC WORKS	
URBAN INDUSTRIAL/COMMERCIAL	
APPROVED BY:	DATE: 8-29-06
104	